

Effective date: 17 July 2019
Status: Approved



Class Rules

International Formula 16 Catamaran Class Association



The International F16 Class became a World Sailing recognised class in November 2010

sport / nature / technology



World Sailing
Class Association

INTRODUCTION

This introduction only provides an informal background and the FORMULA 16 CATAMARAN Class Rules proper begin on the next page.

The FORMULA 16 CATAMARAN was designed to a box rule in 2002 by a group of catamaran enthusiasts on 3 continents cooperating via the internet.

The formula is designed such that it permits sloop rigged or una-rigged versions of compliant designs to race each other on an equal basis. Sloop rigged boats shall be sailed with two crew making them approximately level in performance with a solo crew una-rigged boat.

The strict box measurement rule allows manufacturers to develop catamarans that are competitively priced yet allow freedom to builders to develop toward higher levels of performance. Being open to any manufacturer allows many builders and sail makers to compete and so keep costs to a minimum. The Class remains committed to keeping development under control, maintaining a good balance between cost and performance.

IF16CA measures or checks hulls, hull appendages, rigs and sails which are required to conform to IF16CA standards, such boat parts only being altered to stay in line with current IF16CA rules.

Part 1, Section A covers the administration of the IF16CA and Section B deals with boat eligibility. Sections C to G deal with racing, and should be read in conjunction with World Sailing Equipment Rules of Sailing and the Racing Rules of Sailing.

Owners and crews should be aware that compliance with rules in Section C is NOT checked as part of the certification process.

The Rules regulating the use of equipment during a race are contained in Section C of these class rules, in ERS Part I and in the Racing Rules of Sailing.

PLEASE REMEMBER:

THESE RULES ARE **CLOSED CLASS RULES**
WHEREBY IF IT DOES NOT SPECIFICALLY SAY THAT YOU MAY – THEN YOU SHALL NOT.

COMPONENTS, AND THEIR USE, ARE DEFINED BY THEIR DESCRIPTION

PART 1 ADMINISTRATION

Section A – General

Section A – General

A.1 LANGUAGE

- A.1.1 The official language of the class is English and in case of dispute over translation the English text shall prevail.
- A.1.2 The word “shall” is mandatory and the word “may” is permissive.
- A.1.3 Except where used in headings, when a term is printed in “**bold**” the definition in the ERS applies and when a term is printed in “*italics*” the definition in the RRS applies.
- A.1.4 These rules shall be read in conjunction with the ERS.

A.2 ABBREVIATIONS

WS	World Sailing
MNA	World Sailing Member National Authority
IF16CA	International Formula 16 Class Association
CA	National Class Association
ERS	Equipment Rules of Sailing
RRS	Racing Rules of Sailing

A.3 AUTHORITIES

- A.3.1 The **class rules authority** of the IF16CA is World Sailing which shall co-operate with the IF16CA in all matters concerning these **class rules**.
- A.3.2 Notwithstanding anything contained herein, the IF16CA has the authority to withdraw a certificate and shall also do so at the request of WS
- A.3.3 Each NCA shall keep a record of IF16CA measurers recognised by the class, MNA or WS in their region.

A.4 ADMINISTRATION OF THE CLASS

- A.4.1 The Class is administered by the IF16CA whose governing body is the F16 Governing Council.
- A.4.2 At a National level the NCA administers the class by delegation from the IF16CA. In countries where there is no NCA, the IF16CA will administer the class.

A.5 CLASS RULES VARIATIONS

- A.5.1 At Class Events RRS 89.1.d and 87 applies.
- A.5.2 The requirements of RRS 77 Appendix G 1.3(a) and (b) are amended in respect of Class Insignia as laid out in Appendix H of these class rules

A.6 CLASS RULES AMENDMENTS

- A.6.1 Amendments to these **class rules** are subject to the approval of World Sailing in accordance with World Sailing Regulations, and then ratified by the F16.
- A.6.2 Amendments shall be placed on one year's notice unless it is considered essential to act immediately to prohibit or penalise an undesirable feature.

A.7 CLASS RULES INTERPRETATION

- A.7.1 Interpretation of **class rules** shall be made in accordance with World Sailing Regulations.
- A.7.2 These rules shall take precedence over the Measurement Form

A.8 INTERNATIONAL CLASS BUILDING PLAQUE FEE

- A.8.1 The **hull** builder shall pay World Sailing Building Plaque Fee.
- A.8.2 World Sailing shall, after having received the International Class Building Plaque fee, send the World Sailing Building Plaque to the **hull** builder.

A.9 RECORD OF MEASUREMENT CERTIFICATES & NUMBERS

- A.9.1 Each NCA shall keep an up-to-date record of all certified F16 Catamarans within their remit. Such record will be passed to the IF16CA on demand.
- A.9.2 Sail numbers shall be issued by the NCA or, in the absence of a NCA, the IF16CA.
- A.9.3 Each NCA or, in the absence of a NCA, the IF16CA shall maintain a register of allocated sail numbers in their region.

A.10 BOAT CERTIFICATION

- A.10.1 A certificate shall record the following information:
 - a) Class
 - b) **Certification authority**
 - c) **Sail** number defined by NCA with the owner to avoid two same sail number
 - d) Owner
 - e) **Hull** manufacturer Number
 - f) WS Plaque Number
 - g) Amount, type and position of corrector weight
 - h) Builder/Manufacturers details
 - i) Date of issue of initial certificate
 - j) Date of issue of certificate

A.11 INITIAL BOAT CERTIFICATION

- A.11.1 For a **certificate** to be issued to a boat not previously certified:
 - a) **Certification control** shall be carried out by the **official measurer** who shall complete the appropriate documentation.
 - b) The documentation and certification fee, if required, shall be sent to the **certification authority**.
 - c) Upon receipt of a satisfactorily completed documentation and certification fee, if required, the **certification authority** may issue a **certificate**.

A.12 VALIDITY OF CERTIFICATE

- A.12.1 A **certificate** becomes invalid upon:
 - a) a change to any items recorded on the **certificate** as required under A.10.1.
 - b) expiry date (if any) of the **certificate**,
 - c) withdrawal by the **certification authority**,
 - d) the issue of a new **certificate**,
- A.12.2 Any change of ownership will be recorded on the **certificate** which will then be returned to the NCA with the appropriate fee for re-issue.

Section B – Boat Eligibility

For a **boat** to be eligible for *racing*, it shall comply with the rules in this section.

B.1 CLASS RULES AND CERTIFICATION

- B.1.1 It is the responsibility of the *competitor* to ensure that the **boat** and all its **equipment** are certified prior to commencing a race.
- B.1.2 The boat shall:
- a) be in compliance with the **class rules**.
 - b) have a valid certificate for platform, **spars, hull appendages** and **sails**.
 - c) have valid **certification marks** as required.
- B.1.3 A **boat** may be refused a **certificate** and, in this instance, the incomplete form, together with an explanation of the points in question and reason for refusal, shall be sent to the IF16CA and WS for a ruling in writing. (RRS 78.1 and RRS 78.3.)
- B.1.4 All **certified boats** may be liable to re-measurement at the discretion of the **certification authority** or by an International Jury constituted in accordance with the RRS (Appendix N.) at an event, but only by a Measurer.
- B.1.5 It is the responsibility of both designer and builder of a catamaran that is intended to be sailed within the Formula 16 Class to contact the IF16CA and request that their design, or modification of an existing design, be checked and found to be in compliance with the Formula 16 rules before publicising their product as a "Formula 16" or "Formula 16 compliant".
- B.1.6 The **official measurer** shall report on the measurement form anything which he may consider to be unusual or to depart from the intended nature of the **boat** or to be against the general interest of the IF16CA and a **certificate** may be refused, even if the specific requirements of the IF16CA are satisfied
- B.1.7 The **boat** shall comply with the **class rules** in force at the time of manufacturing.

B.2 CLASS ASSOCIATION MARKINGS

- B.2.1 A valid Class Association Sticker or marking shall be affixed to each certified item as required by the NCA or the IF16CA. See appendix K
- B.2.2 Sails shall carry an official Class Association measurer's mark .

PART II – REQUIREMENTS AND LIMITATIONS

The **crew** and the **boat** shall comply with the rules in Part II when *racing*. In case of conflict Section C shall prevail.

The rules in Part II are **closed class rules**. **Certification control** and **equipment inspection** shall be carried out in accordance with the ERS except where varied in this Part.

Section C – Conditions for Racing

C.1 GENERAL

C.1.1 RULES

- a) RRS 49.1 shall not apply.
- b) RRS 50.4 shall not apply.
- c) RRS Appendix G.1.3(d) and G.1.3(e) shall not apply.
- d) The ERS shall apply.

C.2 CREW

C.2.1 LIMITATIONS

- a) The **crew** shall consist of 1 or 2 persons, at least one of whom shall be a full member of their NCA or IF16CA.
- b) No **crew** member shall be substituted, omitted or added during an event, unless prior, written consent is obtained from the event organising committee.
- c) With 1 **crew** on board, the boat shall be sailed as a **una rig** see C.10.2.
- d) With 2 **crew** on board, the boat may be sailed as a **sloop rig** see C.10.2.

C.2.2 WEIGHTS

There is no minimum or maximum **crew** weight; save that the **crew** shall be capable of righting the **boat** unaided by external assistance in all normally encountered sailing conditions. Righting bags or poles are permitted.

C.2.3 ABILITY

The **crew** may be required by the race organisers, the NCA or the IF16CA to demonstrate their ability to right the **boat** from a capsize position without external assistance. Such request must not affect the crews' participation in fair racing.

C.3 PERSONAL EQUIPMENT

C.3.1 MANDATORY

- a) The **boat** shall be equipped with a **personal floatation device** for each **crew** member to the minimum standard ISO 12402-5 (Level 50), or EN 393 50N, USCG Type III, or AUS PFD 1.

C.3.2 OPTIONAL

- a) Trapeze harness for each **crew** member.
- b) Any other **personal equipment**.

C.4 ADVERTISING

C.4.1 LIMITATIONS

Advertising shall only be displayed in accordance WS Advertising Code.

C.5 PORTABLE EQUIPMENT

C.5.1 MANDATORY

- a) One distress whistle per person; securely fitted to the body or gear being worn.
- b) At least one knife, capable of cutting the trampoline or lines found on board.
- c) A towing line of at least 15m of length.

C.5.2 OPTIONAL

- a) Electronic or mechanical timing devices.
- b) One or more magnetic compasses.
- c) Water Bottle Holder(s).
- d) Wind Indicator(s).
- e) If carried, one anchor of not less than 2 kg in weight and with not less than 15m of line of not less than 6 mm in diameter.
- f) One paddle.
- g) Electronic navigation devices.

C.5.3 SPECIAL CASES

- a) **Boats** shall comply with any special equipment requirements placed on them by a Notice of Race without penalty under any other section of these Rules.

C.6 BOAT

C.6.1 WEIGHT

- a) The minimum weight of the **una rig boat** as defined in C.10.2 shall be 119 Kg.
- b) The minimum weight of the **sloop rig boat** as defined in C.10.2 shall be 123 kg

C.6.2 CORRECTOR WEIGHTS

- a) Corrector weights of metal shall be permanently fastened to the front beam when the boat weight is less than the minimum requirement
- b) The total weight of such corrector weights shall not exceed 7kg. See also rules A10.1 (f) , B1.1

C.6.3 FLOTATION

- a) The **hull** shall be fully decked

C.7 HULL

C.7.1 FITTINGS

- a) Each **hull** shall have at least one inspection hatch.
- b) Inspection hatch covers and drainage plugs shall be kept in place at all times when *racing*.
- c) All other **hull** fittings are optional except where specified in these rules.

C.7.2 LIMITATIONS

- a) The **hulls**, beams and trampoline shall not be permanently fixed to one-another.

C.8 HULL APPENDAGES

C.8.1 LIMITATIONS

- a) Only one **daggerboard** and one **rudder** blade per **hull** shall be used during an event, except when a **hull appendage** has been lost or damaged beyond repair.
- b) The **rudder** blade shall be hung from the transom of the **hull**.

C.8.2 DAGGERBOARD

a) DIMENSIONS

The shortest distance between the lowermost point of the **daggerboard** and the **hull** when fully extended shall not exceed 1060mm.

b) USE

If fitted, **daggerboards** shall conform to the following:

- i. The **daggerboard** shall be inherently straight in length;
- ii. Asymmetrical chord cross-section is optional;
- iii. When in the fully down position, fore/aft movement of **daggerboards** will not be allowed.
- iv. End fences/horizontal or near horizontal appendages below the waterline will not be allowed. The board shall be capable of removal, without tools, via the upper opening of the case.
- v. **Daggerboards** shall not be canted at greater than 6° from the vertical in the transverse plane when the boat is level on the **waterplane**.

C.8.3 RUDDER

a) DIMENSIONS

- i. There is no minimum or maximum dimension for **rudders** save that there shall be one **rudder** per **hull**.
- ii. **Rudders** may have **trim tabs** and/or **foils**. The width shall not exceed 200mm from the rudder's centre plane.

b) LIMITATIONS

The **rudder** retention devices shall retain the **rudders**, in the event of capsize.

c) USE

Any device for adjusting the angle of any **appendages** shall be locked while *racing*.

C.9 RIG

C.9.1 FITTINGS

- a) The **mast** pivot shall be fixed on the centreline of the front beam.
- b) **Sail** and **mast** adjustment fittings may be fitted.
- c) **Forestay**, diamond **stays** and **shroud** tension/rake adjustment devices or fittings are permitted.

C.9.2 LIMITATIONS

- a) Only one set of **spars** and **standing rigging** shall be used during an event, except when an item has been lost or damaged, and the Race Committee has approved the substitution.
- b) Replacement of damaged **spars** may only be made with the approval of the Race Committee.
- c) Adjustment of **mast** rake, the tension of the **standing rigging**, the angle or length of the **spreaders** and the position of the **bowsprit** while *racing* is not permitted.
- d) Adjustment of all other items not listed in C.9.2(c) above, including diamond **stays**, is permitted while *racing*.

C.9.3 MAST

- a) The **mast** shall be positioned on the centreline of the **boat**.

C.9.4 BOOM

- a) The **boom** may have fittings attached.

C.9.5 BOWSPRIT

- a) The **bowsprit** shall be attached to the front beam.
- b) The **bowsprit** shall be fixed on the centreline of the **boat** and shall not be adjusted while *racing*.
- c) The **bowsprit** may have fittings attached.
- d) (e)The **bowsprit** may have wind indicator(s) attached

C.9.6 RUNNING RIGGING

- a) No restrictions on **running rigging**.

C.10 SAILS

C.10.1 MODIFICATIONS, MAINTENANCE AND REPAIR

- a) Routine maintenance such as repairs to **seams** and patching not involving panel replacement is permitted without re-measurement and re-certification.
- b) Battens may be placed or replaced in the **batten pockets**.

C.10.2 LIMITATIONS

- a) Una Rig – 1 crew
 - i. Not more than 1 **mainsail**, and 1 spinnaker shall be carried aboard.
 - ii. Not more than 1 **mainsail**, and 1 spinnaker shall be used during an event, except when a **sail** has been lost or damaged beyond repair.
 - iii. If the spinnaker is omitted the boat must still meet the minimum weight requirement for a **una rig boat**.
- b) Sloop Rig – 2 crew
 - i. Not more than 1 **mainsail**, 1 **jib**, and 1 **spinnaker** shall be carried aboard.
 - ii. The **jib** may be omitted if the **crew** so elect. If the **jib** is omitted the **boat** must still meet the minimum **boat** weight requirement for a **sloop rig boat**.
 - iii. Not more than 1 **mainsail**, 1 **jib** and 1 **spinnaker** shall be used during an event, except when a **sail** has been lost or damaged beyond repair.

C.10.3 MAINSAIL

a) IDENTIFICATION

The national letters and **sail** numbers shall comply with the RRS Appendix G.

b) USE

- i. It shall be possible to raise and lower the **sail** whilst afloat.
- ii. The luff bolt rope shall be in the spar groove or track

C.10.4 JIB

a) USE

- i. The **sail** shall be set on the **forestay**.
- ii. The **tack point** shall remain on the centreline of the boat.

C.10.5 SPINNAKER

a) USE

The **luff** of the **sail** shall be set between the **mast** and the **bowsprit**.

Section D – Hull

D.1 PARTS

D.1.1 MANDATORY

- a) **Hull** shell
- b) Deck
- c) Front beam (also known as main beam)
- d) Rear beam
- e) Trampoline

D.1.2 OPTIONAL

- a) Bulkheads
- b) Sub-deck(s)
- c) The **hull** may have **fittings** attached

D.2 GENERAL

D.2.1 RULES

- a) The **hull** shall comply with the **class rules** in force at the time of initial certification.

D.2.2 CERTIFICATION

- a) Only the controls, measurements and calculations made by an **official measurer** recognized by the IF16CA, a NCA or WS are considered valid.

D.2.3 MODEIFICATIONS, MAINTENANCE AND REPAIR

- a) Routine maintenance such as painting and polishing is permitted without re-measurement and re-certification.

D.2.4 IDENTIFICATION

- a) **Hulls** shall have a unique serial number.
- b) From the 1st July 2011 all new **hulls** shall carry a WS Plaque permanently placed on one transom or on the inside of the **hulls** just below the rear beam.

D.2.6 BUILDERS

- a) A licence is not required to build an F16 catamaran.

D.3 HULL SHELL

D.3.1 MATERIALS

- a) The **hull** shell shall be built from any material commercially available

D.4 DECK

D.4.1 MATERIALS

- a) (a) The **deck** shall be built from any material commercially available.

D.5 BEAMS

D.5.1 MANDATORY

- a) Front beam (also referred to as the main beam).
- b) Mast step.
- c) Rear beam.

D.5.2 CONSTRUCTION

- a) The beams shall be made of any material commercially available.

- b) The mast pivot on the main/front beam shall be fixed on the centreline of the **boat**.
- c) The main/front beam may have a strut and tie of optional material.
- d) The rear beam may incorporate a **mainsail** traveller track.
- e) The main/front beam may incorporate a **jib** traveller track and/or a self tacking system.
- f) Local reinforcement is permitted inside the main/front beam for the **mast** step.
- g) Local reinforcements are permitted inside the main/front beam and the rear beam for supporting fixing bolts.
- h) The **mast** step shall be in a fixed position.
- i) The beams may accommodate adjustment fittings.

D.6 TRAMPOLINE

D.6.1 MATERIALS

- a) optional, except that netting with a mesh size greater than 1 cm² is prohibited.

D.6.2 CONSTRUCTION

- a) A single trampoline, which may be in separate sections, shall cover the area between the front beam and the rear beam.
- b) Lacing and lacing eyes are permitted.
- c) A spinnaker bag is permitted.
- d) Storage bags and pouches are permitted.
- e) Stainless steel wire or synthetic lines for tensioning the trampoline are permitted.
- f) The trampoline may have fittings attached.

D.7 ASSEMBLED HULL

D.9.1 FITTINGS

- a) MANDATORY
 - i. Forestay bridle fitting.
 - ii. Shroud plates.
- b) OPTIONAL
 - i. Trampoline fitting attachments.
 - ii. Bowsprit fitting attachments.
 - iii. Foot loops, toe straps, trapeze gear, crew restraining line.
 - iv. **Daggerboard** retention/placement fittings.
 - v. **Hulls** may have fittings attached.
 - vi. Additional inspection hatches.

D.9.2 DIMENSIONS

- a) The maximum **hull length** of each **hull** shall be 5.00 m.
- b) The maximum **boat beam** shall be 2.50 m.

D.9.3 CONSTRUCTION

- a) The **hulls** shall be joined rigidly by a front beam and a rear beam.
- b) Sealing strips of any suitable material for **daggerboard** slots (if fitted) are permitted.
- c) Traveller and/or trampoline tracks may be fitted to the hulls.
- d) Non-slip surfaces, built in or applied to the hulls, are allowed.

Section E – Hull Appendages

E.1 PARTS

E.1.1 MANDATORY

- a) **Rudders.**
- b) Tillers.
- c) Tiller connecting bar.

E.1.2 OPTIONAL

- a) **Daggerboards.**
- b) Tiller extension.

E.2 GENERAL

E.2.1 RULES

Hull appendages shall comply with the **class rules** in force at the time of **certification**.

E.2.2 MODIFICATIONS, MAINTENANCE AND REPAIR

- a) **Hull appendages** shall not be altered in any way except as permitted by these class rules.
- b) Routine maintenance such as cleaning and sanding is permitted without re-certification. See RRS 53.

E.2.3 CERTIFICATION

An **official measurer** recognized by the IF16CA, a NCA or WS shall **certify hull appendages** and shall number the **certification mark**.

E.2.4 MANUFACTURERS

A licence is not required to manufacture **hull appendages**.

E.3 DAGGERBOARD

E.3.1 RULES

The **daggerboard** shall comply with the **class rules** in force at the time of **certification**. An **official measurer** recognized by the IF16CA, a NCA or WS shall **certify daggerboards** and shall number the **certification mark**. There shall be a maximum of one **daggerboard** per **hull**.

E.3.2 MATERIALS

The **daggerboards** may be made using carbon fibre, glass fibre, wood, foam plastics, resins, paints, glues and metal fastenings.

E.3.3 CONSTRUCTION

- a) The **daggerboards** shall have no moving parts.
- b) **Ballast** is not permitted.
- c) Lightening holes or cut-outs are permitted.

E.3.4 FITTINGS

Pivot bushings and height restraining systems may be fitted.

E.4 RUDDER BLADE, RUDDER STOCK AND TILLER

E.4.1 RULES

The **rudders** shall comply with the **class rules** in force at the time of **certification**.

E.4.2 CERTIFICATION

An **official measurer** recognized by the IF16CA, an MNA or WS shall **certify rudders** and shall number the **certification mark**.

E.4.3 MATERIALS

- a) **Rudders** may be made using carbon fibre, glass fibre, wood, foam plastics, resins, paints, glues and metal fastenings.
- b) The rudder stock shall be made from any commercially available material.
- c) The tiller and extension shall be made from any commercially available material.

E.4.4 CONSTRUCTION

The cross section of each **rudder** shall be symmetrical about its fore and aft centre plane.

E.4.5 FITTINGS

- a) MANDATORY
 - i. 2 rudder fittings.
 - ii. Rudder stock / Rudder retaining mechanism or clip.
- b) OPTIONAL
 - i. 2 gudgeons.
 - ii. 2 pins or pintles.
 - iii. Pivoting and/or lowering systems.

Section F – Rig

F.1 PARTS

F.1.1 MANDATORY

- a) **Mast.**
- b) **Standing rigging.**
- c) **Running rigging.**
- d) **Bowsprit.**

F.1.2 OPTIONAL

- a) **Boom.**
- b) **Spinnaker retrieval system.**

F.2 GENERAL

F.2.1 RULES

- a) The **spars** and their fittings shall comply with the **rules** in force at the time of certification of the **spar**.
- b) The **boom** (if fitted), **bowsprit**, all standing and all running **rigging** shall comply with the **class rules**.

F.2.2 MODIFICATIONS, MAINTENANCE AND REPAIR

- a) **Spars** shall not be altered in any way except as permitted by these **Class Rules**.
- b) Routine maintenance such as cleaning and minor repairs is permitted without re-measurement and re-certification.

F.2.3 CERTIFICATION

- a) An **official measurer** recognized by the IF16CA, an MNA or WS shall **certify spars** and shall number the **certification mark**.
- b) **Certification** of standing and running **rigging**, **bowsprit** and **boom** is not required.
- c) Each **mast** shall have a **certification mark** on the starboard side.

F.2.4 MANUFACTURER

- a) A licence is not required to manufacture **spars**.

F.2.5 DEFINITIONS

- a) **MAST DATUM POINT**
The **heel point** is the **mast datum point**

F.3 MAST

F.3.1 MATERIALS

- a) The **mast** shall be made of aluminium, wood or carbon fibre and epoxy resin.

F.3.2 CONSTRUCTION

- a) The **mast** may have no more than one fixed sail groove, which may be integral with the **mast spar**.
- b) The **mast** shall have one masthead fitting, which may include the mainsail locking device.
- c) The **mast** shall have a heel fitting attached.
- d) The **mast** shall be designed and constructed so that the **mast tip** is sealed to prevent ingress of water.

F.3.3 DIMENSIONS

- a) The **mast** may be tapered.
- b) **Mast spar curvature** maximum 10mm

	minimum	maximum
Mast spar circumference		500 mm
Distance between top of the front beam and the mast datum point (mast foot height)		75 mm
Mast length		8575 mm
Upper point height		8500 mm
Spinnaker hoist height		7500 mm

F.3.4 FITTINGS

- a) MANDATORY
- i. One masthead fitting which may include the mainsail locking device.
 - ii. Heel fitting.
 - iii. Hounds fittings.
- b) OPTIONAL
- i. Pair of adjustable rake spreader bars and fittings.
 - ii. Diamond stay attachment and adjustment fittings.
 - iii. **Spinnaker halyard** guide.
 - iv. **Spinnaker halyard** block and attachments.
 - v. Gooseneck fittings.
 - vi. **Mast** rotation control fittings.
 - vii. **Mast** may have reinforcement at fittings points.
 - viii. Cunningham downhaul fittings.
 - ix. The **mast** may have other fittings not here listed.

F.4 BOOM

F.4.1 MATERIALS

- a) The **boom**, if fitted, shall be made of aluminium, wood or carbon fibre / epoxy resin.

F.4.2 CONSTRUCTION

- a) The **boom** may include a fixed sail groove or track which may or may not be integral with the boom.

F.4.3 FITTINGS

- a) Adjustment fittings are optional.

F.5 BOWSPRIT

F.5.1 RULES

- a) The **bowsprit** shall be on the **boat** centreline.

F.5.2 MATERIALS

- a) The **bowsprit** shall be made of any commercially available material.

F.5.3 CONSTRUCTION

- a) The **bowsprit** shall have an end cap and be smooth rounded and blunt.
- b) The **bowsprit** may have a “snuffer” attachment.

F.5.4 FITTINGS

- a) MANDATORY
 - i. Attachment points to **hull** shells.
- b) OPTIONAL
 - i. Adjustment fittings.

F.5.5 DIMENSIONS

- a) The maximum length of the **bowsprit** shall be 3.50m measured from the leading edge of the main beam to the end cap.

F.6 STANDING RIGGING

F.6.1 MATERIALS

- a) The **standing rigging** consisting of **shrouds**, mast diamond **stays**, **forestay** and bridles shall be free in material choice.
- b) The **forestay** shall be on the **centreline** of the **boat**.
- c) **Trapeze** lines may have adjustable height fittings.

F.7 RUNNING RIGGING

F.7.1 MATERIALS

- a) Materials are optional.

F.7.2 CONSTRUCTION

- a) MANDATORY (SLOOP OR UNA RIG)
 - i. **Mainsail sheet.**
 - ii. **Spinnaker halyard.**
 - iii. **Spinnaker sheets.**
- b) MANDATORY (SLOOP RIG)
 - i. **Jib halyard.**
 - ii. **Jib sheet.**
- c) OPTIONAL
 - i. **Mainsail** Cunningham line.
 - ii. **Mainsail halyard.**
 - iii. **Mainsail** outhaul.
 - iv. **Jib Cunningham** line.
 - v. **Spinnaker** tack outhaul line.
 - vi. Single **spinnaker** uphaul / downhaul and retrieval line.

- vii. **Mast** rotation control lines.
- viii. Any other adjustment fitting.

Section G – Sails

G.1 PARTS

G.1.1 SAIL TYPES

- a) **Mainsail.**
- b) **Jib.**
- c) Spinnaker.

G.2 GENERAL

G.2.1 RULES

- a) **Sails** shall comply with these **class rules** in force at the time of **certification**.

G.2.2 CERTIFICATION

- a) An official measurer recognized by the IF16CA, a MNA or WS shall **certify** all **sails**.

G.2.3 SAILMAKER

- a) A licence is not required to manufacture **sails**.
- b) From 1st July 2010 and beyond, the material of the **body of the sail** shall be indelibly marked, by a plaque or label, near the **tack point** by the sailmaker together with the year date, the material from which the **sail** was made and a serial number.

G.3 MAINSAIL

G.3.1 IDENTIFICATION

- a) The Class insignia shall conform to the dimensions and requirements as detailed and be placed in accordance with the diagram contained in Appendix H (X.1).

G.3.2 MATERIALS

- a) The **mainsail** shall be constructed from a commercially available sailcloth material.

G.3.4 CONSTRUCTION

- a) The construction shall be that of a **soft sail**.
- b) The **body of the sail** shall consist of the same woven and/or **laminated ply** throughout.
- c) The **sail** may have **batten pockets** which may extend from **leech** to **luff**.
- d) The **sail** may be constructed so that it can be reefed by means of reefing point(s) adjacent to the **luff**, point(s) adjacent to the **leech** and corresponding point(s) in the **body of the sail**.
- e) The following are permitted: stitching, glues, tapes, bolt ropes, corner eyes, headboard with fixings, Cunningham eye or pulley, battens, **batten pocket patches**, batten pocket elastic, batten pocket end caps, mast and boom slides, leech line with cleat, one or more **window(s)**, tell tales, sail shape indicator stripes and items as permitted or prescribed by other applicable rules.
- f) The **foot** may be convex.

G.3.5 DIMENSIONS

The **sail** shall be measured in accordance with the F16 Measurement form (see Appendix J (X.1)) and ERS Section G.

	minimum	maximum
Sail area (including the side area of the mast spar)	-	15 m ²
Mainsail luff length	-	8100mm
Top width		980mm

G.4 JIB

G.4.1 MATERIALS

- a) The **mainsail** shall be constructed from a commercially available sailcloth material.

G.4.2 CONSTRUCTION

- a) The construction shall be that of a **soft sail**.
- b) The **body of the sail** shall consist of the same woven and/or **laminated ply** throughout.
- c) The **sail** may have **batten pockets** which may extend from **leech** to **luff**.
- d) The following are permitted: stitching, glues, tapes, corner eyes, headboard with fixings, Cunningham eye or pulley, zips, Velcro and sleeve **luff**, battens, **batten pocket patches**, batten pocket elastic, batten pocket end caps, leech line with cleat, tell tales, one **window** and items as permitted or prescribed by other applicable *rules*.

G.4.3 DIMENSIONS

The **sail** shall be measured in accordance with Appendix J (X.2) and ERS Section G.

	minimum	maximum
Sail area	-	3.70 m ²
Luff length (A)	-	6000mm
Leech length (C)	-	6000mm

G.5 SPINNAKER

G.5.1 MATERIALS

- a) The **ply** fibres shall consist only of nylon or polyester materials.

G.5.2 CONSTRUCTION

- a) The construction shall be: **soft sail, single ply sail**.
- b) **Primary** and **secondary reinforcement** is permitted at the **sail corners** and the recovery points.
- c) The following are permitted: stitching, glues, tapes, corner eyes, recovery line eyes, tell tales, leech lines and items as permitted or prescribed by other applicable *rules*.
- d) The area and the dimensions of the **spinnaker (luff length, leech length, half width, foot length)** shall be written in an indelible manner near the starboard tack (the sailmakers label or foot tape may be used).

G.5.3 DIMENSIONS

The **sail** shall be measured in accordance with see Appendix J (X.3) and the ERS Section G.

	minimum	maximum
Sail area		17.5 m ²
Ratio of half width (SMG)/ foot length (SF)	75%	

PART III – APPENDICES


Section H

APPENDIX H (X.1)

CLASS INSIGNIA AND POSITION ON SAIL

A **certified** F16 Catamaran shall carry an official F16 logo on the **mainsail** such that it conforms to the following:


1. The logo maximum dimensions shall be 200mm high and 300mm wide.
2. The top of the port side logo shall be a minimum of 900mm and a maximum of 1500mm from the lower outside edge of the **mainsail clew**.
3. The foremost point of the logo shall be a minimum of 500mm and a maximum of 800mm from a point where a line extended across the top of the logo crosses the **mainsail leach**.
4. The starboard logo shall be placed immediately above the port logo but on the starboard side of the **mainsail**.
5. The official F16 logo may be obtained from the F16CA.

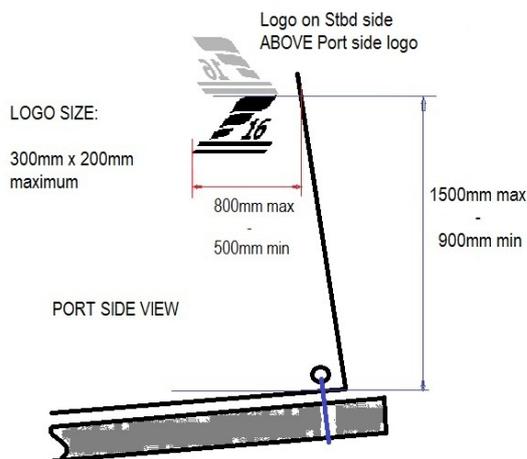

Section I

APPENDIX I (X.1)

MAST DATUM POINT AND MEASUREMENTS

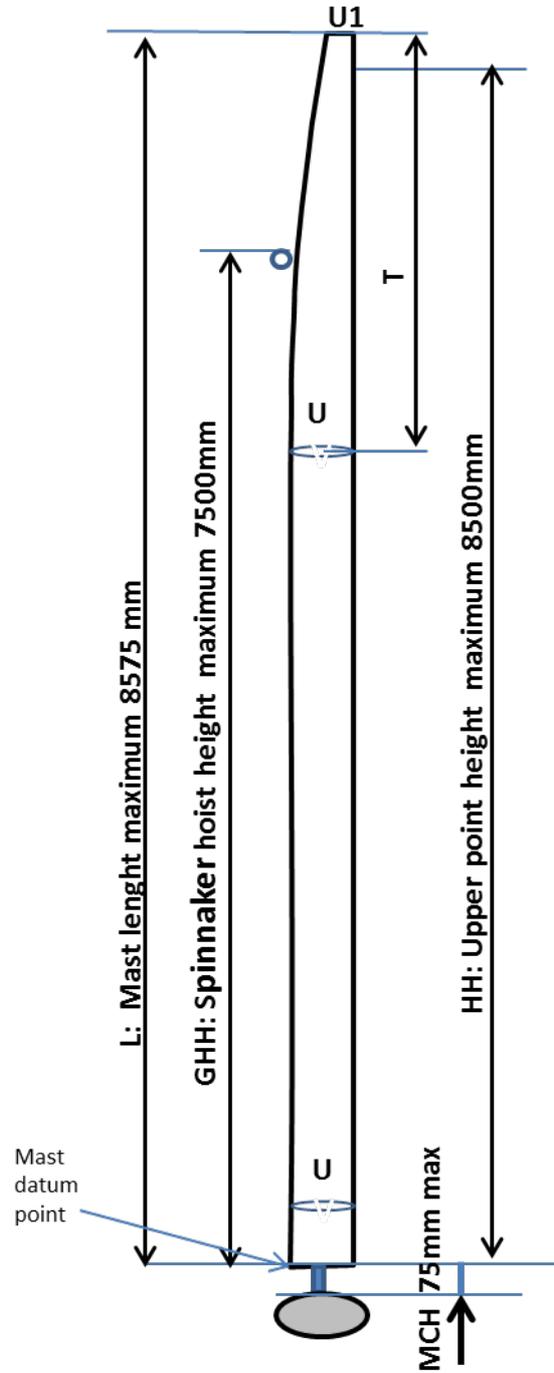


Mast datum point = Heel Point

Section J

APPENDIX J (X.1)

MAINSAIL MEASUREMENT


$S1 : ((h+h1)*(a-a1)+(a1*h))/2$
 $S2 : (cxh2)/2$
 $S3 : 2/3 c3xh3$
 $S4 : (c4xh4)/2$
 $S5 : 2/3 c5xh5$
 $S6 : 2/3 c6xh6$
 $S7 : 2/3 axh7$
 $S8 : 2/3 bxh8$
Sail area: $S1+S2+S3+S4+S5+S6+S7+S8$

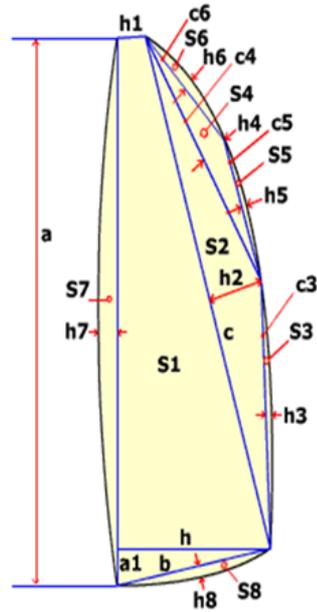

APPENDIX J (X.2)

JIB MEASUREMENTS


$1/2((A-h4)xh)$ Nb: $h14 < 0$
 $2/3(Axh12)$
 $2/3(Bxh10)$
 $2/3(Cxh11)$
 $1/2(Dxh14)$
Jib area = $S1+S2+S3+S4$

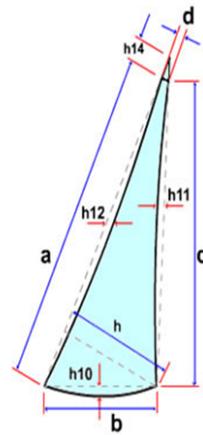

APPENDIX J (X.3)

SPINNAKER MEASUREMENTS

$SPI\ aera = SF*(SL1+SL2)/4 + (SMG-SF/2)*(SL1+SL2)/3$

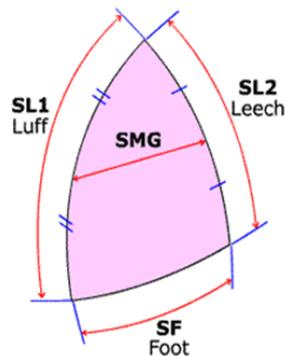

Section K

APPENDIX K

MARKS



	Hulls	Mainsail	Jib	Gennaker/spi	Mast	Centerboards	Rudders	
Current certificate		SA (area m ²)	JA(area m ²)	SP(area m ²)				
		A Luff (m)	A Luff (m)	SL1/SL2/SMG/SF				
				Ratio SMG/SF (%)				
		Sail maker						
		Manufacturing year						
		Material						
		Serial nber (CIN) on transom	Serial nber					Serial number
		Certificate number near back beam	Certificate with registered number					Certificate number
		Measurement date near back beam	Measurement date					Measurement date
		Measurer name & sign near back beam	Measurer name & sign					Measurer name & sign

Effective Date: 17-07-2019

Published Date: 16-07-2019

Previous issues: 01-07-2011

World Sailing